

ARD 75 Immersion Fitting

Modular Fitting with an Extraordinary Range of Functions for up to 3 Sensors

The fitting is used for measuring in tanks, basins and channels. For maximum flexibility, it offers numerous functions that can be freely combined. The special design facilitates sensor replacement. High-quality PP-H or PVDF makes it very sturdy. It can hold up to 3 sensors (PG 13.5) and accepts almost every standard sensor.

Applications

- PP-H: Water, wastewater, industrial water
- PVDF: Chemical and petrochemical industry, power plants, electroplating, ore processing

Facts and Features

- High variability — adaptable to virtually every process
- Safe functioning, easy maintenance thanks to a special and unique design
- Easy removal/installation of the sensor adapter with just ½ turn of a coupling nut (manual).
- Removal of the sensor adapter through the top or from the bottom of the immersion pipe
- No cable twisting during sensor installation
- Sensor adapters: 3 x PG 13.5 / PG 13.5 with pressurization / SE670 G1 / SE 655, SE 656 (G¾) / ¾" NPT / 1" NPT / SE680 / G1 for SE 604-MS, SE605-MS
- Rinse function for cleaning the sensors without opening or dismantling the fitting (PG 13,5, internal supply of rinse medium incl. check valve)
- Immersion depths: 25 – 250 cm
- Materials: PP-H, PVDF
- High pressure and temperature resistance
- Wetting cup
- Process connections: flange DN 80 – DN 100 or ANSI 3"- 4", optionally with sliding flange bushing
- wall holder
- catenary suspension (also as submersible version)
- pipe clamp
- Cable glands: EPDM cap with cable support sleeves and strain relief, submersible cable glands
- Stainless steel bracket for strain relief of the sensor cable



Catenary suspension
Ambient side with cable gland

Plastic tube with special sleeve geometry
25 ... 250 cm long




Sensor adapter

ARD 75 Immersion Fitting

Specifications

Sensors	3 x Ø12 mm, length 120 mm, thread PG 13.5 / SE670 G1 / SE 655, SE 656 / thread ¾" NPT/ 1" NPT / SE 680 / G1 for SE 604-MS, SE 605-MS	
Diameter	75 mm	
Pressure/temperature	See diagram	
Process connections	Loose flange EN 1092-1	DN80/DN100
	Loose flange ANSI B 16.5/150 lbs	3"/4"
	Wall holder	Stainless steel 1.4571
	Catenary suspension	Also as submersible version
	Pipe clamp	Adjustable stop, stainless steel 1.4571
Wetted materials	Fitting	PP-H/PVDF
	Sealing material	EPDM / FKM / FFKM / FFKM Perlast G75B
	Rinsing	PEEK, Hastelloy
	Catenary suspension	Rope: polyamide
Sensor protection in the process	Probe guard integrated in the sensor adapter for sensors with 12 mm dia., 120 mm length, PG 13.5 thread	
Immersion depth	250, 500, 1000, 1500, 2000, 2500 mm [special lengths (in cm) available on request]	
Rinsing	Hose	NW 6 mm
	Material	EPDM
	Check valve in the sensor adapter	
Transport and storage temperature	14 ... 158 °F (-10 ... 70 °C)	
Ambient temperature	23 ... 131 °F (-5 ... 55 °C)	
Protection according to EN 60529	Ambient side open	IP10
	Ambient side with rubber cap	IP65
	Ambient side cable gland	IP68 (immersion depth: 10 m permanently) and IP66

Removing the Sensor Adapter for Replacing the Sensor

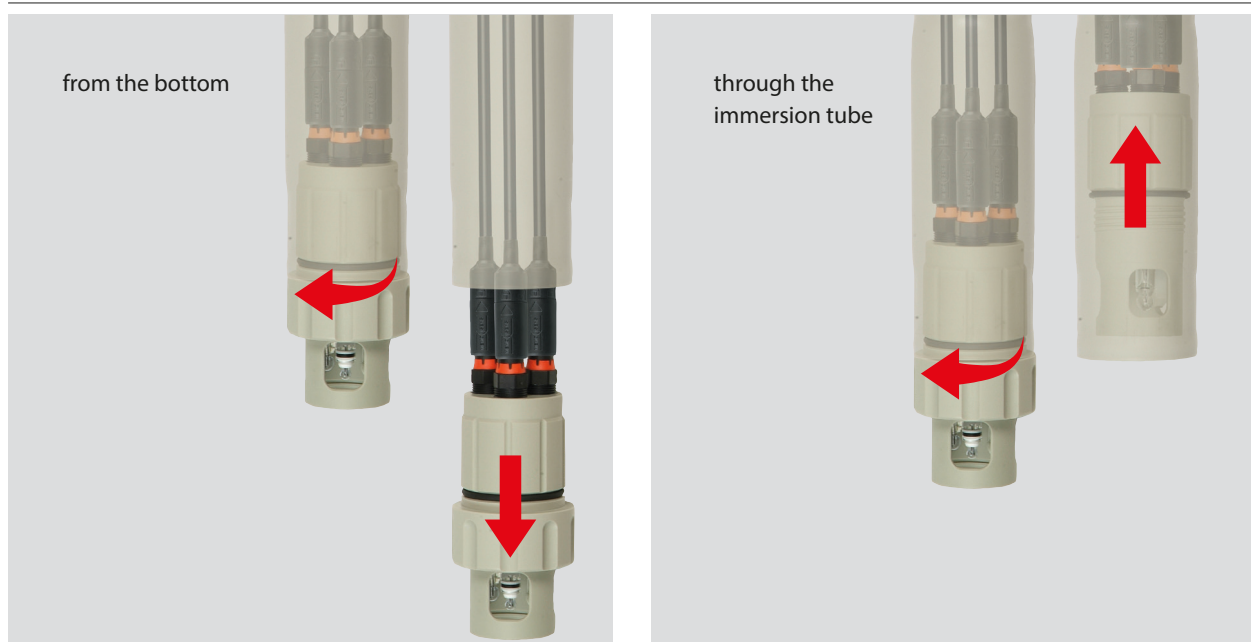

Modular System

This immersion fitting comes in 6 different nominal lengths (special lengths on request).
The modular system is completed by various cable glands, process connections and sensor adapters.





ARD 75 Immersion Fitting

Product Range

Immersion fitting	ARD 75-	N																		
Material of fitting	PP-H	P																		
	PVDF	D																		
Sensor adapter	3 x PG 13.5	1																		
	3 x PG 13.5; with rinse function	2																		
	pH sensor, Ø 12 mm, pressurized	3																		
	SE 670/G1	4																		
	SE 655 (X) / SE 656 (X)	5																		
	¾" NPT	6																		
	1" NPT	7																		
	SE 680	8																		
	G1 for SE 604-MS / SE605-MS	9																		
Sensor adapter with wetting cup	3 x PG 13.5	A																		
	3 x PG 13.5; with rinse function	B																		
	pH sensor, Ø 12 mm, pressurized	C																		
Gasket material	FKM	A																		
	EPDM	B																		
	FFKM	K																		
	FFKM Perlast G75B	L																		
Process connection	Flange, loose, PN10/16, DN 80	0 B 3																		
	Flange, loose, PN10/16, DN 100	0 B 4																		
	Flange, loose, PN 10/16, DN 80, sliding flange bushing	V B 3																		
	Flange, loose, PN 10/16, DN 100, sliding flange bushing	V B 4																		
	Flange, loose, ANSI, 150 lbs, 3"	0 D 3																		
	Flange, loose, ANSI, 150 lbs, 4"	0 D 5																		
	Flange, loose, ANSI, 150 lbs, 3", sliding flange bushing	V D 3																		
	Flange, loose, ANSI, 150 lbs, 4", sliding flange bushing	V D 5																		
	Wall holder with locking function, stainless steel 1.4571	W 0 0																		
	Catenary suspension	S 0 0	B/D/E/F																	
	Catenary suspension, submersible version with weight	S T 0	E	0	2	5														
	Pipe clamp with adjustable stop	R 0 0																		
Without process connection	0 0 0																			
Ambient side	Open	A																		
	Open, stainless steel bracket for cable strain relief	B																		
	Rubber cap	C																		
	Rubber cap, stainless steel bracket for cable strain relief	D																		
	Cable gland	E																		
Cable gland, stainless steel bracket for cable strain relief	F																			
Nominal body length [cm]	25									0	2	5								
	50									0	5	0								
	100									1	0	0								
	150									1	5	0								
	200									2	0	0								
	250									2	5	0								
	Special length (25 cm minimum)									*	*	*								
Special version	Without																	0	0	0
	Customer-specific special data sheet																	F		

Dimension Drawings

Base Body

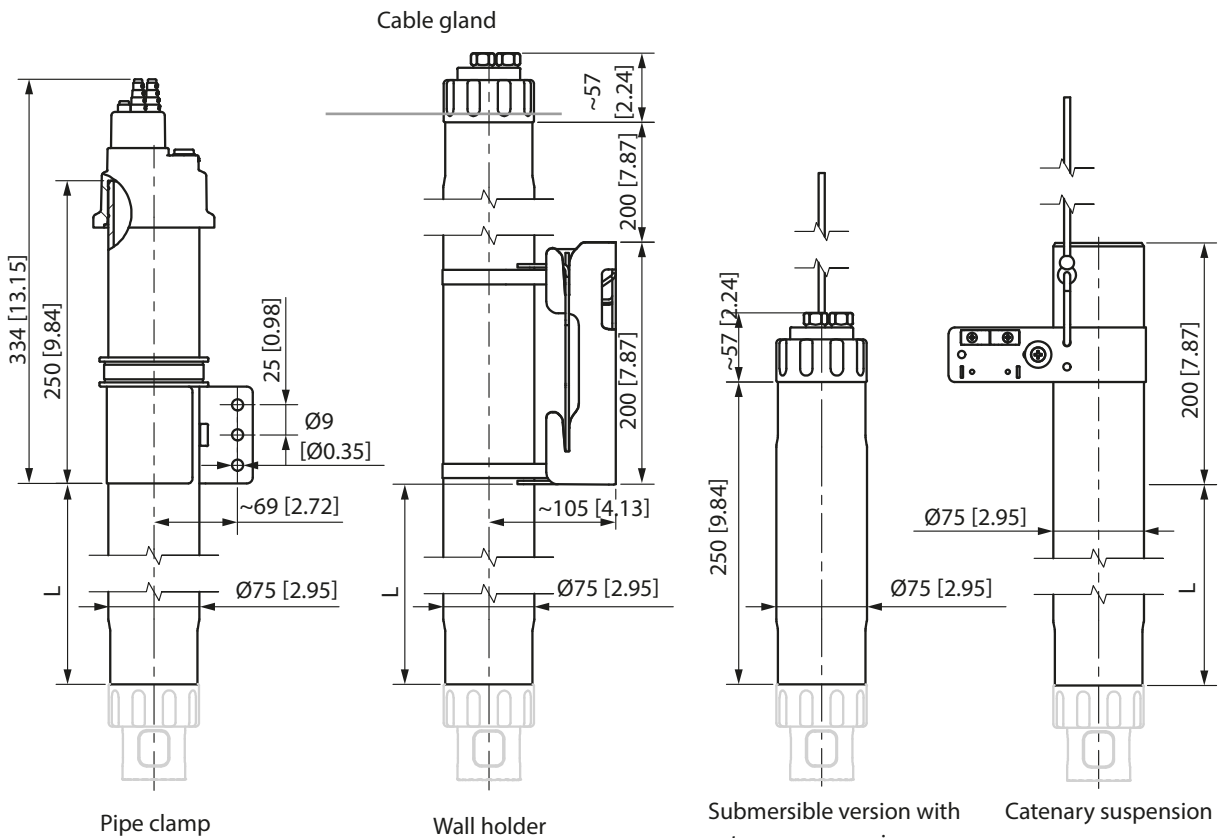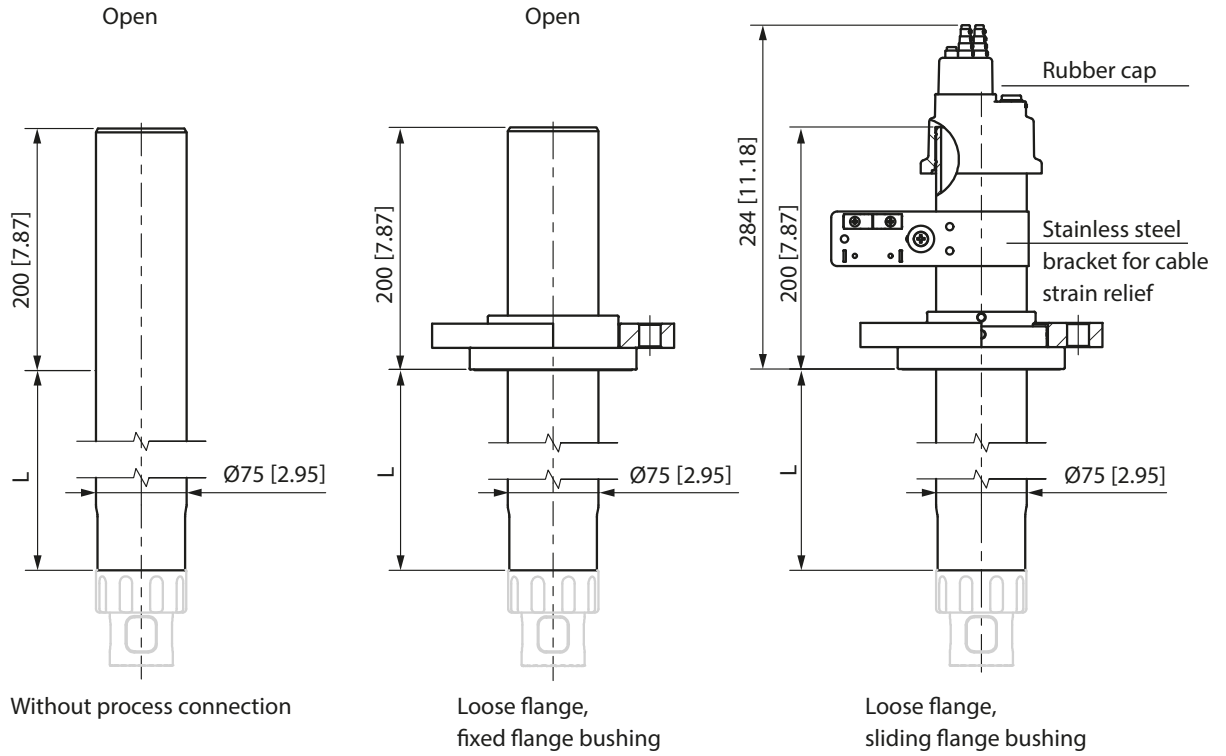



L = Nominal body length, see product range on Pg. 4

ARD 75 Immersion Fitting

ARD 75 Immersion Fitting

Dimension Drawings


Sensor Adapters

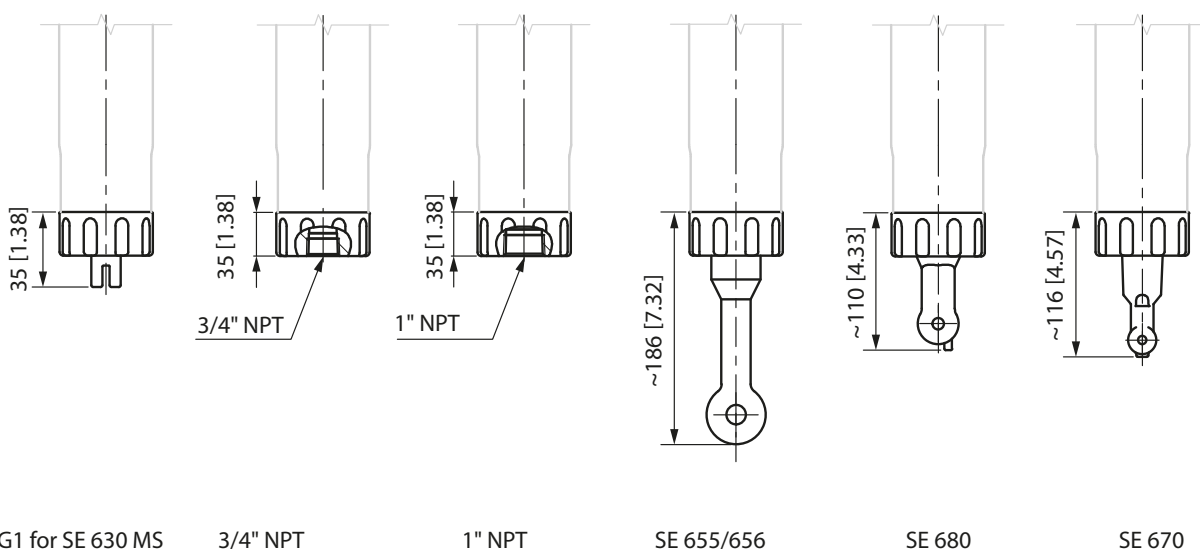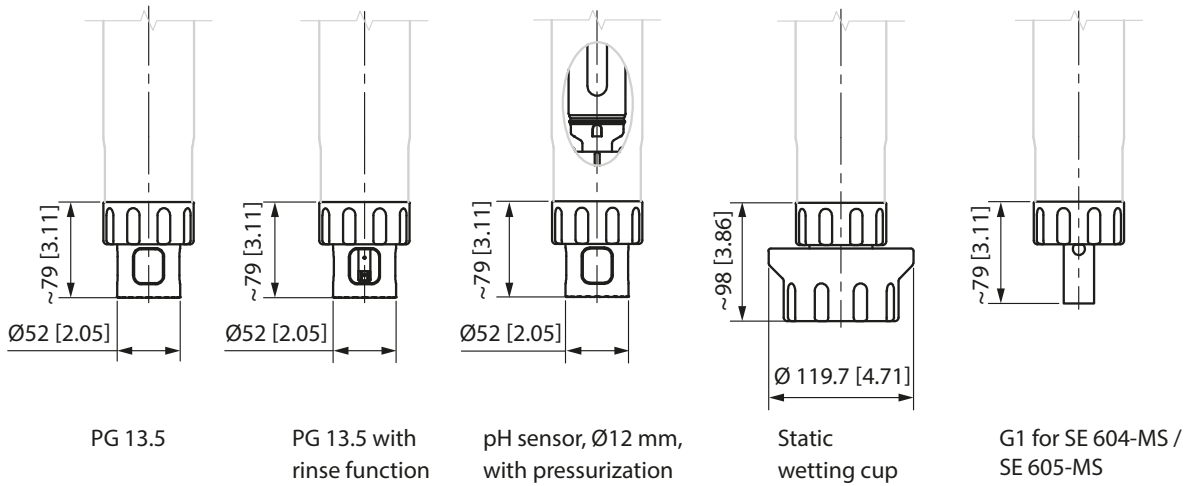

All dimensions in mm [inches]

Process Pressure/Temperature Diagram


Material: PVDF

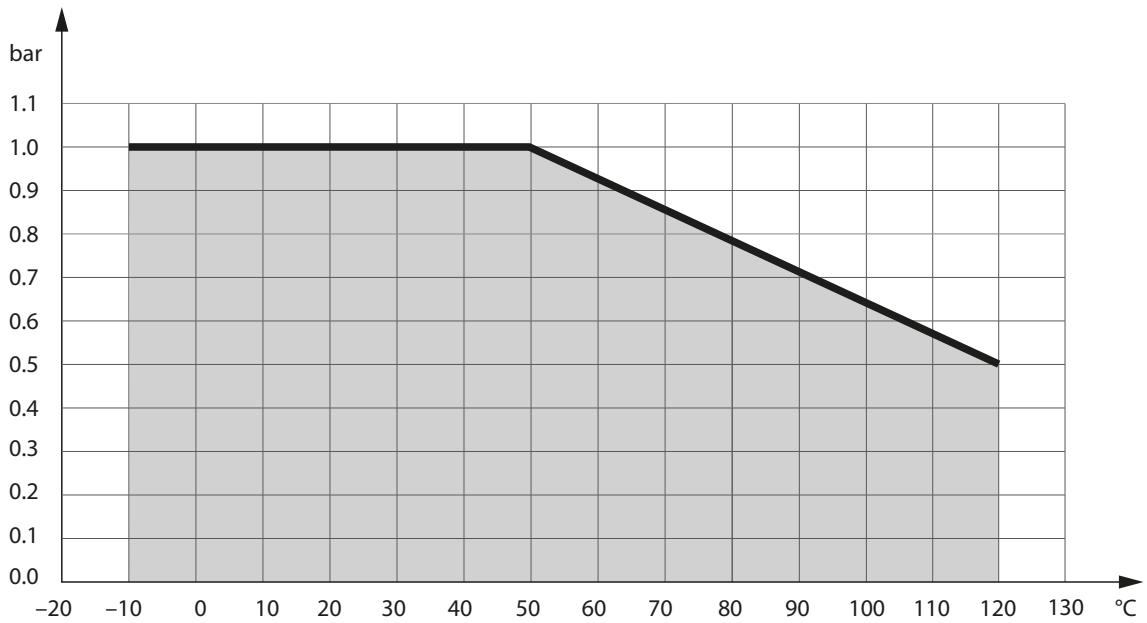

ARD 75 Immersion Fitting

Process Pressure/Temperature Diagram

Material: PP-H

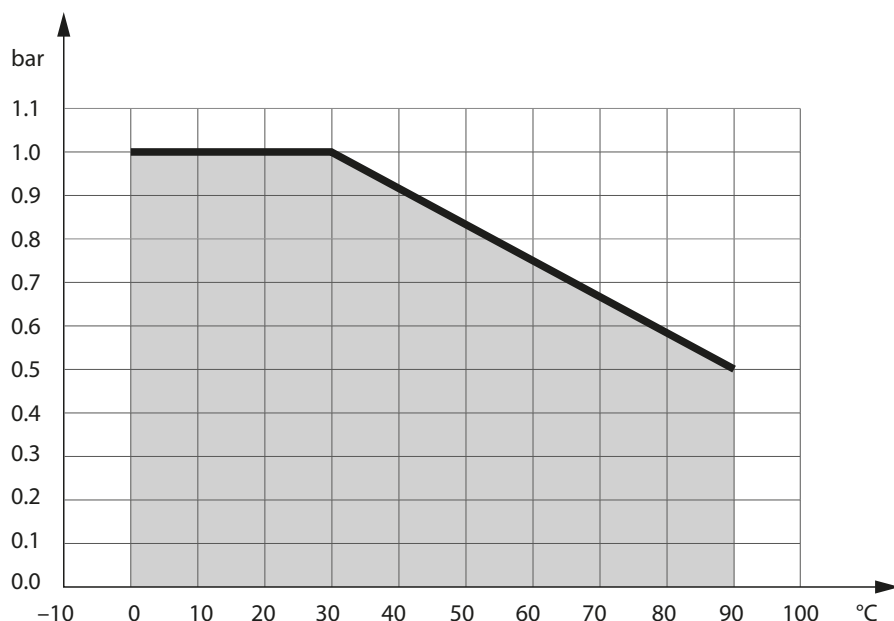

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
 Астана +7(7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395) 279-98-46
 Киргизия (996)312-96-26-47

Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Таджикистан (992)427-82-92-69

Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93