


Set-Point Alarm Relays

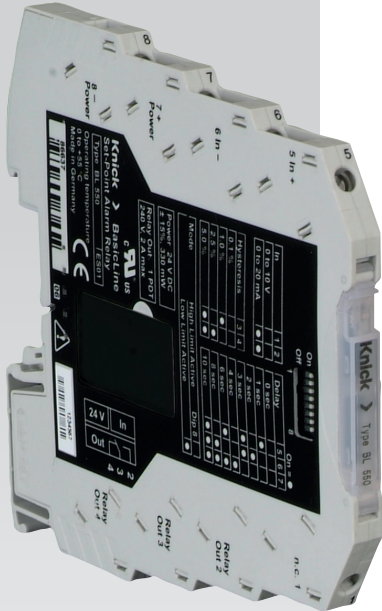


BasicLine BL 550

Highly compact set-point alarm relay with changeover output contacts


Facts

- Simple monitoring and control of standard signals
- NC/NO changeover
- Limit values / switching thresholds freely adjustable using potentiometer on the front
- Input signal, switching hysteresis and delay adjustable using DIP switches
- 3-way isolation
- Minimum space consumption in the enclosure: 6-mm housing
- CE compliant and UL approved
- 3-year warranty
- Perfect price-performance ratio

Block Diagram

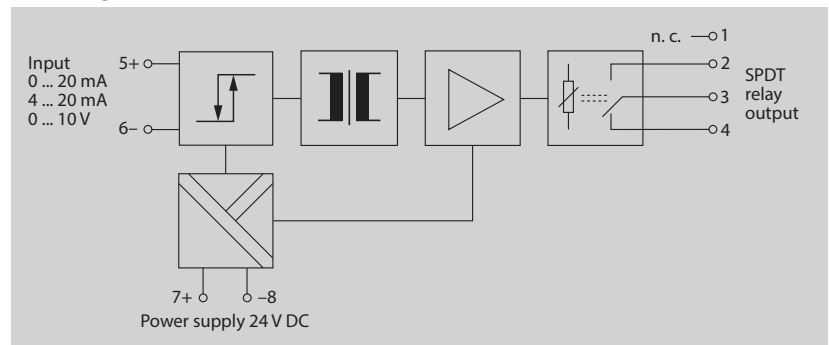

Limit Monitoring of a Sensor (Temperature, ...)

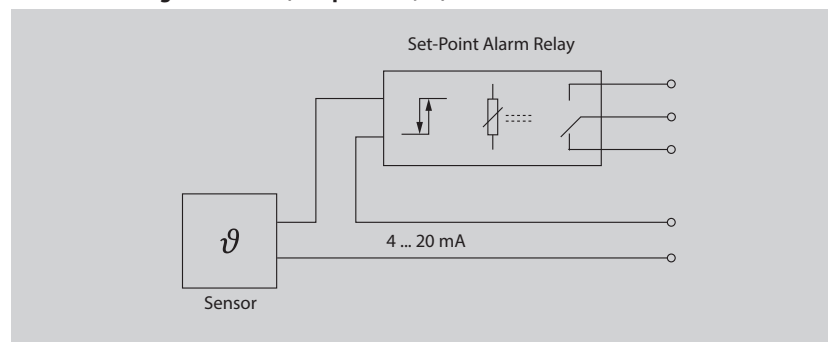

Input	Output	Power supply
0 ... 20 mA 4 ... 20 mA 0 ... 10 V	SPDT changeover relay, single pole	24 V DC

Product Line

Device

BasicLine BL 550

Order No.

BL 550

Specifications

Input

Voltage	0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V	
Resistance	Current input	50 ohms
	Voltage input	100 kohms
Overload capacity	Current input	100 mA
	Voltage input	30 V

Min/max output

Output type	SPDT relay output	
Contact type	1 changeover contact	
Contact material	AgSnO ₂ , hard gold plated	
Max. switching voltage	240 V AC	
Limiting continuous current	2 A	
Switching threshold	Adjustable using potentiometer on the device front	
Response delay	0 s ... 10 s (0 s; 1 s; 2 s; 3 s; 4 s; 6 s; 8 s; 10 s)	
Internal hysteresis	0.1 %; 1 %; 2.5 %; 5 %	

General data

Temperature coefficient ¹⁾	< 0.02 %/K	
Setpoint repeatability	< 0.2 % full scale	
Step response	< 35 ms	

Power supply

Power supply	24 V DC (± 15 %), approx. 330 Wm	
--------------	----------------------------------	--

Isolation

Galvanic isolation	3-port isolation between input, output and power supply	
Test voltage	1,5 kV AC, 50 Hz	
Working voltage	50 V AC/DC (basic insulation) with overvoltage category II / pollution degree 2 according to EN 61010-1	

Standards and approvals

Conformity	CE compliant	
EMC ²⁾	Directive 2004/108/EC	
Radiated emission	EN 61000-6-4	
Immunity to interference ²⁾	EN 61000-6-2	
Approval	UL Recognized Component, File No. E306206, Standards: UL 508 and CAN/CSA C22.2 No. 14-95	

Further data

Ambient temperature	Operation: 0 ... +55 °C Transport, storage: -20 ... +85 °C	
Housing	Modular housing, screw terminals, IP 20 protection	
Mounting	35-mm mounting rail, EN 60715	
Dimensions	6.1 mm x 101 mm x 93 mm	
Wire cross-section	Max. 2.5 mm ² , 24-14 AWG	
Weight	Approx. 50 g	

1) Average TC in specified operating temperature range, reference temperature 23 °C

2) Slight deviations are possible while there is interference (typically 5%)

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Таджикистан (992)427-82-92-69

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93