

SE 102-MS pH Sensor

pH sensor with high reliability and precision, digital, with Memosens technology

The special pH glass enables rapid, stable sensor response. It can be used in a broad temperature range, even under difficult measuring conditions. The liquid electrolyte of the reference electrode can be refilled. Designed for a wide range of applications, the sensor is ideal for measuring with Portavo portable analyzers.

Applications

Chemistry, quality control, food and beverages, aggressive media


Facts and Features

- Perfect galvanic isolation thanks to Memosens technology
- No influence of humidity in the connector
- Can be precalibrated
- Digital data transfer
- Integrated sensor diagnostics
- Liquid electrolyte, refillable
- Integrated temperature detector
- Ceramic junction
- Special pH glass with low impedance; suitable for measurements in a broad temperature range, including low temperatures

Specifications

pH:	0 ... 14
Temperature:	-5 ... 100 °C
Temperature detector:	NTC 30 kΩ
Reference system:	Ag/AgCl, liquid electrolyte, refillable
Junction:	Ceramic
Length:	110 mm
Sensor connector:	Memosens laboratory head, for use with Portavo sensor quiver

Dimension Drawing

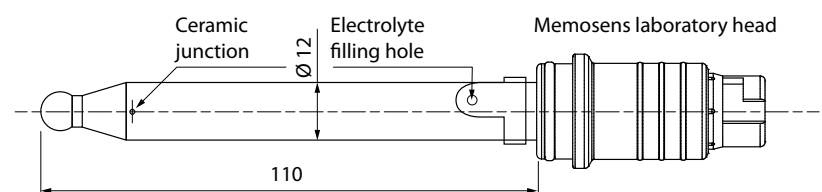

All dimensions in mm

SE 102-MS Memosens pH Sensor

Product Range

Sensor	Length	Order No.
SE 102-MS pH sensor	110 mm	SE 102-MS

Accessories

Accessories	Length	Order No.
Memosens cable	1.5 m	CA/MS-001XFA-L
	2.9 m	CA/MS-003XFA-L

CaliMat Buffer Solutions (20 °C)

pH value	Quantity	Order No.
pH value 2.00 ± 0.02	250 ml	CS-P0200/250
	1000 ml	CS-P0400/1000
	3000 ml	CS-P0400/3000
pH value 4.00 ± 0.02	250 ml	CS-P0400/250
	1000 ml	CS-P0700/1000
	3000 ml	CS-P0700/3000
pH value 7.00 ± 0.02	250 ml	CS-P0700/250
	1000 ml	CS-P0700/1000
	3000 ml	CS-P0700/3000
pH value 9.00 ± 0.02	250 ml	CS-P0900/250
	1000 ml	CS-P0900/1000
	3000 ml	CS-P0900/3000
pH value 12.00 ± 0.05	250 ml	CS-P1200/250

Electrolyte Solution

Electrolyte Solution	Quantity	Order No.
KCl, 3 mol/l	250 ml	ZU 0960

MemoSuite

Management software for Memosens sensors	Order No.
Basic version (calibration)	SW-MS1400-B
Advanced version (calibration, diagnostics, documentation)	SW-MS1400-A

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
 Астана +7(7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395) 279-98-46
 Киргизия (996)312-96-26-47

Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Таджикистан (992)427-82-92-69

Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93